Inductive Proximity Sensor - 20mm Square Plastic Housing Multicomp PRO

RoHS Compliant



Features

- Inductive sensor, style: squared shape, 20mm × 20mm × 38mm
- · Mounting distance: 8mm shielded
- · With LED operation indicate lamp, easily identifiable
- · Standard sensing object: ferrous metals

out

out

- · Protection rate: IP67, water resistant
- · Over-current and short circuit protection; against polarity reversal.
- Widely applied in measuring, Counting, Rpm measuring in mechanism, chemical, paper manufacture light industry, etc.

Specifications

Mounting Distance : 8mm shielded Sensing Distance : 7.2mm shielded

Power Supply : 10V DC to 30V DC/ 90V AC to 250V AC

Frequency : 500Hz / 250Hz (DC 3/2 wires) / 25Hz (AC 2 wires)

Current Output (DC) : 200mA / 300mA Ambient Temperature : -20°C to 70°C


Against Polarity Reversal : Yes

Short Circuit Protected : 3 wires: Yes / 2 wires: No


IP Rating : IP67

Electrical Connection

NPN NO/NC BLACK OUT NO+NC WHITE BLUE BROWN +V BLACK OUT NO+NC WHITE BLUE BROWN BLACK OUT NO+NC WHITE BLUE BROWN BLACK OUT BLUE BROWN BLACK OUT BLUE BROWN BLACK WHITE BLUE




Picture Of Product



Inductive Proximity Sensor - 20mm Square Plastic Housing Multicomp PRO


Installation


If used in an area surrounded by metal, Install the proximity Sensor as follows . (Sn = Sensing distance)

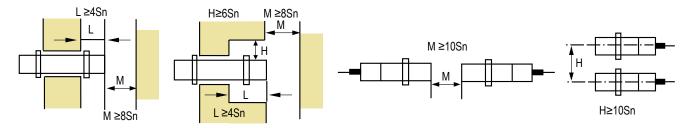


Inductive Proximity Application Direction


- A. Set mounting distance equal to 80% of Sn.
- B. Set mounting distance roughly equal to 50% of Sn when sensor is used measuring mounting frequency or operating in high speed circumstances.
- C. Mounting distance will change depending on material (iron, stainless steel, brass, copper and aluminium).







D. Inductive Proximity series connection and parallel connection



Inductive Proximity Sensor - 20mm Square Plastic Housing Multicomp PRO

Part Number Table

| Part Number | Output Type | Mounting Distance | Current Output | Power Supply | Wire Connector |
|-------------|-------------|-------------------|----------------|-------------------|----------------|
| MP002229 | NPN NO | 8mm Shielded | 200mA | 10V DC to 30V DC | 3 Wire |
| MP002230 | NPN NC | | | | 3 Wire |
| MP002231 | NPN NO + NC | | | | 4 Wire |
| MP002232 | PNP NO | | | | 3 Wire |
| MP002233 | PNP NC | | | | 3 Wire |
| MP002234 | PNP NO + NC | | | | 4 Wire |
| MP002235 | DC NO | | | | 2 Wire |
| MP002236 | DC NC | | | | |
| MP002237 | AC NO | | 300mA | 90V AC to 250V AC | |
| MP002238 | AC NC | | | | |

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

