

Features

- Reflow Solderable
- · High Luminous Intensity and Low Power Dissipation
- · Good Reliability and Long Life
- Lead Free

Applications

- Optical indicatorIndoor display
- · Backlighting in dashboard and switch
- · Flat backlighting for LCD, symbol and display
- · General use

RoHS Compliant

Specifications

Dice material : AlGalnP
Emmiting Colour : Red
Lens colour : Water Clear

Electrical and Optical Characteristics at Ta=25°C

Parameter	Symbol	Min.	Тур	Max	Units	Test conditions
Forward voltage	VF	1.8	-	2.4	V	IF=20mA
Reverse Current	IR	-	-	10	uA	VR=5V
Dominant wavelength	λd	626	-	638	nm	IF=20mA

Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Rating	Units	
Power Dissipation	Pd	48	mW	
DC Forward Current	IF	20	mA	
Peak Forward Current [1]	IFP	75	mA	
Reverse Voltage	VR	5	V	
Electrostatic Discharge (HBM)	ESD	2000	V	
Operating Temperature	Topr	-40 to +85	°C	
Storage Temperature	Tstg	-40 to +100	°C	

Notes:

- 1. 1/10 Duty cycle,0.1ms pulse width.
- 2. Measurement Errors:Forward Voltage:±0.1V
- 3. The tolerance of wave length ±1nm

Selection Guide

Part Number	Chip	Lens Type	Luminous	Viewing Angle		
Part Number m	materials		Min	Тур	Max	201/2
MP008285	Red (AlGalnP)	Water Clear	30	-	100	120

Note:

- 1. 201/2 is the angle from optical centerline where the luminous intensity is 201/2 the optical centerline value.
- 2. The above luminous intensity measurement allowance tolerance ±10%


Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro





multicomp PRO


Typical optical characteristics curves


Ambient Temperature VS. Forward Current






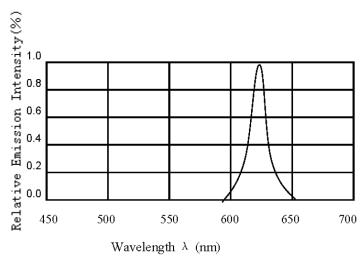









Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

multicomp PRO

multicomp PRO

Dimensions

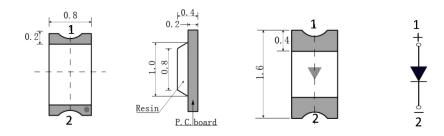



Notes Dimensions : Millimetres

- 1. All dimension tolerance is ±0.2mm unless otherwise noted
- 2. All PCB and markings are subject to change without prior notice

SMT Reflow Soldering Instructions


- 1. High temperature welding recommended no more than 2 times
- 2. When soldering, do not put stress on the LEDs during heating
- 3. Reflow temperature distribution (Acc.to J-STD-020D)

Profile feature	Sn-Pb Eutect	tic Assembly	Pb-Free Assembly		
Profile leature	Large body	Small body	Large body	Small body	
Average ramp-up rate (TL to Tp)	3°C / second max.				
Preheat -Temperature Min (TSmin) -Temperature Max (TSmax) -Time (min to max) (ts)	100°C 150°C 60 to 120 seconds		150°C 200°C 60 to 180 seconds		
Tsmax to TL -Ramp-up Rate			3°C / sec	cond max.	
Time maintained above -Temperature (TL) -Time (tL)	183°C 60 to 150 seconds		217°C 60 to 150 seconds		
Peak Temperature (Tp)	225 +0/-5°C	240 +0/-5°C	245 +0/-5°C	260 +0/-5°C	
Time within 5°C of actual Peak Temperature (tp)	10 to 30 seconds		10 to 30 seconds	20 to 40 seconds	
Ramp-down Rate	6°C / second max.				
Time 25°C to Peak Temperature	6 minutes max.		8 minutes max.		

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro





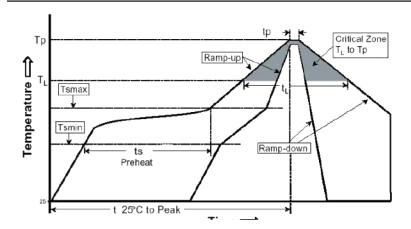

Soldering iron

- 1. When hand soldering, the temperature of the iron must be less than 350°C for 3 seconds
- 2. The hand solder should be done only once

Part Number Table

Description	Part Number
Chip LED, Red, 638nm, 120°, 100mcd, Surface Mount	MP008285

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

